


# Cloud-Tracker



## Quick Installation Guide CT-01 GPS Tracker



MODEL NO. CT-01  
Version 1.0

# 1 Introduction

Hardware Interface:



Package Contents

- 1 Cloud Tracker
- 820mAh battery
- QIG
- NFC ID card
- USB cable
- CD
- 5V power supply
- Anti-Slip Pad

System Requirement

Windows 7 Windows Vista Windows XP

# 2 Tracker Basic Operation

- Power On: Hold [Power] button for 10 sec till beep.
- Power Off: Press [Power] button once and hold 'Power' button for 5 sec till music sound.
- Dial a preset Call: Press [Power] button to unlock keypad. Press the number key and press [OK] to dial a call.

Tracker LED indication:

Red blink	No GSM signal
Blue blink	No Internet connection
Green blink	GPS/GSM signal is fixed.
Green fast blink	Tracker is sending data.
Yellow blink	Searching GPS signal
Red->Green blink	Battery level is less than 35%
Red fast blink	Battery level is less than 10%
Green on	Charging completed

# 3 SIM card Installation

Cloud-Tracker needs to a GSM SIM card with voice/SMS/data allowance. The service rate depends on your local service provider. Please use the suitable service plan for your need. 1MB data traffic can send 20,000 waypoints.


Install a SIM card

- 1.Unlock and open the back panel
- 2.Take the battery out
- 3.Insert the SIM card




# 4 Cloud-Tracker Wizard

- 1.Insert the Installation CD and Autorun will start. (or you can run setup.exe manually.)
- 2.Choose Language, consent the agreement and choose the setup path.

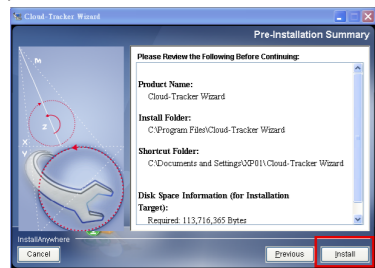

Install

- 3.Click [Install] when the following message pops up.

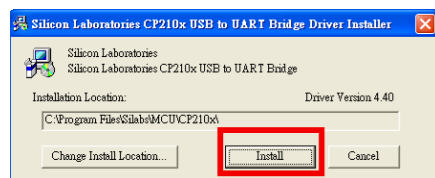


Install

- 4.Cloud Tracker Wizard will run after installation.




# 5 Cloud Tracker basic settings

- 1.Follow the screen instruction to power on Cloud Tracker and connect Cloud Tracker with your PC.

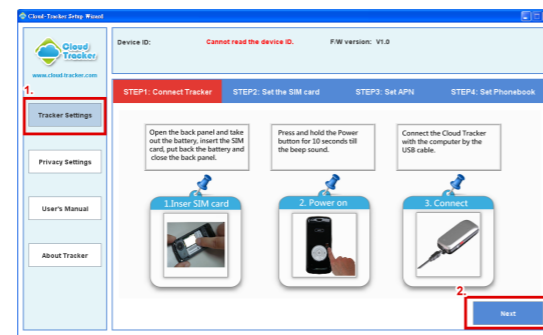


Next

- 2.Enter the PIN code to unlock SIM card and click [Next]. If PIN is unlocked successfully, you will hear a beep sound from Cloud Tracker.

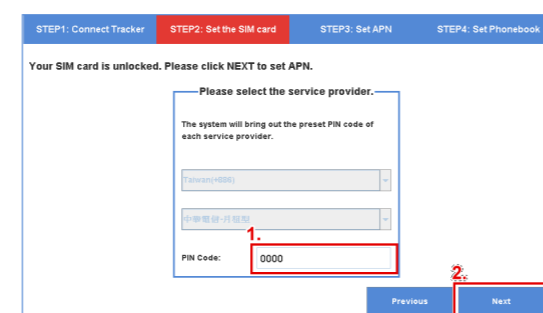

Next


- 3.Choose your service provider to bring in APN settings.

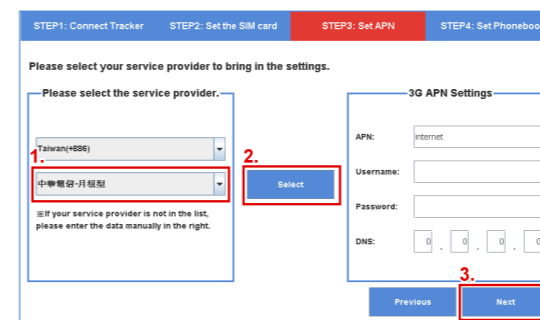

Next

※If your service provider is not in the list, please enter APN settings manually.


- 4.Enter SIM card phone number and the 4 preset hotline numbers. (You can also change phone numbers in APP.)

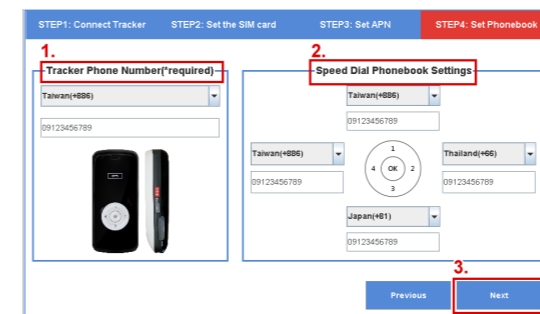

Next


※Geo Fence and SOS alert is sent to the 4 preset hotline numbers by SMS (text message). Please make sure you enter the hotline numbers correctly.

- 5.The Cloud Tracker will restart automatically with the new settings. You can use Cloud Tracker APP and My Cloud web service to manage Cloud Trackers.

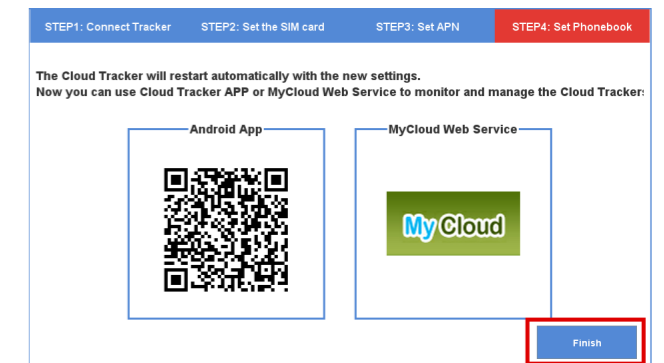

Finish

Click [Yes] for the privacy settings.

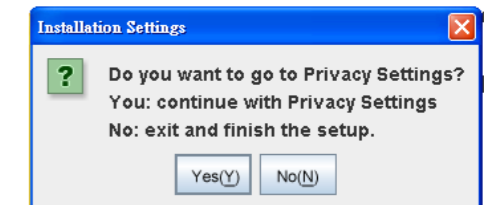


Yes(Y)

# 6 Cloud Tracker Privacy Settings

The privacy settings let you set up Allowed users to access Cloud Tracker. You can see the Allowed List or setup White / Black list to block unauthorized users to access Cloud Tracker's position and status.

## 1. Manage Allowed List


For a brand new Cloud Tracker, the Allowed List should be empty. It means no one can access this Cloud Tracker. You can also delete unwanted users here. Our server will block those deleted users to access this Cloud Tracker.

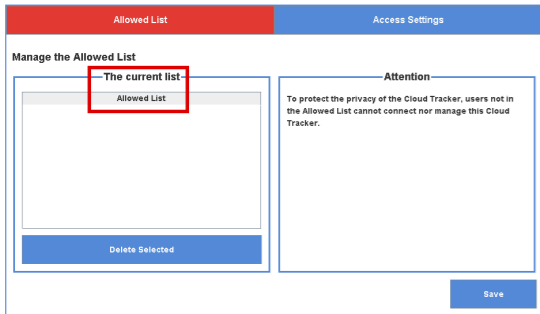

※Your PC needs to connect to Internet for privacy settings.

## 2. Access Settings

You can setup White / Black list in Access Settings for Allowed users.

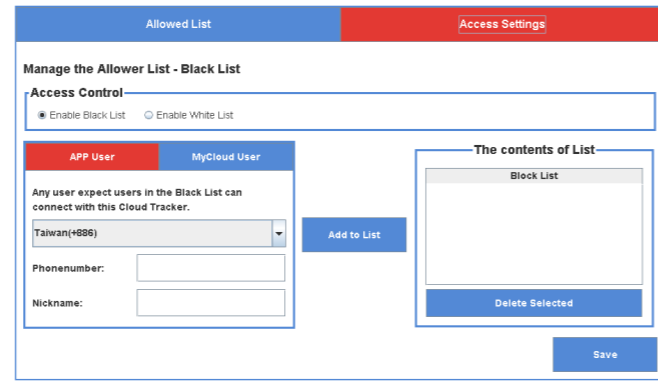

※Cloud Tracker default mode is [Black List]. Any user with Tracker device ID can access this Cloud Tracker.


# 7 Cloud Tracker APP Installation

1. Download and install Cloud Tracker APP from Google Player <https://play.google.com/store/apps/developer?id=JareyMobile>



## 2. Register an account:

Please use your mobile phone number to register the account. We will use a SMS to verify your account. When the registration is completed, you will be login to the APP main page.



## Notice for GPS positioning

### ※Get the position for the first time:

Cloud-Tracker will take a longer time to get GPS signal for the first use. Please place Cloud Tracker at a place without shield to accelerate positioning time. When LED is changed to Green blink, Cloud Tracker gets the GPS signal from satellites.

### GPS cold start:

If you power off Cloud Tracker for a while or Cloud Tracker is moved offline for a long distance, Cloud Tracker needs a few minutes to get GPS signal from satellites. The real start time depends on your position and environment.

### GPS warm start:


If you power off Cloud Tracker for a short period or it does not move offline for a big distance, Cloud Tracker can get GPS signal around 10 seconds.

### How to accelerate GPS positioning:

Please power on Cloud Tracker in an open space, without shield. It can short the time for Cloud Tracker to get GPS signal. If using Cloud Tracker in a building or basement, Cloud Tracker may not get GPS signal.

# 8 Add a Cloud Tracker

## 1. Go to [Trackers]

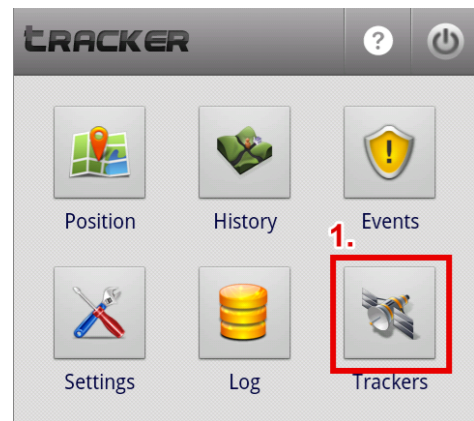


2. Touch Cloud Tracker ID card with your smart phone to add this Cloud Tracker.



3. The device ID is in the back of Cloud ID card.


4. If your smart phone does not support NFC, please enter the device ID manually.

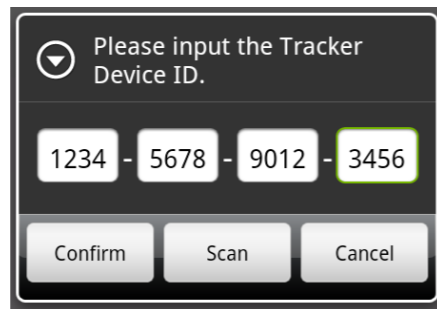

5. Edit Cloud Tracker nickname, photo and phone number.



6. Click [Confirm] to finish. You can now use Cloud Tracker APP to access and manage this Cloud Tracker.

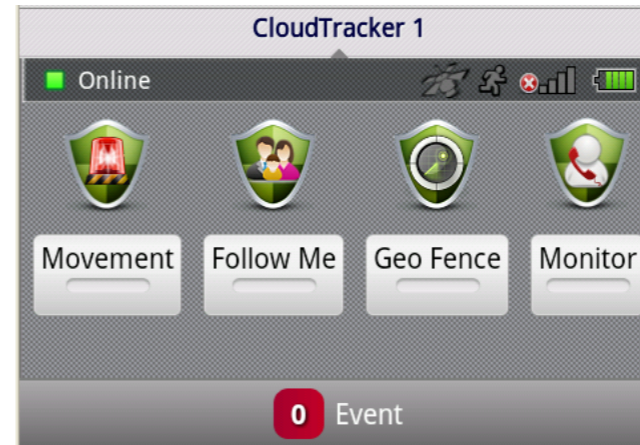

## Customer Support

You can get our products information and server status:  
<http://www.cloud-tracker.com>

Download software, Firmware, wizard and user's menu:  
[http://www.cloud-tracker.com/tw/product\\_download.html](http://www.cloud-tracker.com/tw/product_download.html)

Contact us by email for any technical support:  
Email: [services@jareymobile.com.tw](mailto:services@jareymobile.com.tw)